

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H01L 21/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/43021</p> <p>(43) International Publication Date: 26 August 1999 (26.08.99)</p>
<p>(21) International Application Number: PCT/US99/03114</p> <p>(22) International Filing Date: 11 February 1999 (11.02.99)</p> <p>(30) Priority Data: 09/025,320 18 February 1998 (18.02.98) US</p> <p>(71) Applicant: APPLIED MATERIALS, INC. [US/US]; 3050 Bowers Avenue, Santa Clara, CA 95054 (US).</p> <p>(72) Inventors: BRODINE, Jeff; 21441 Madrone Drive, Los Gatos, CA 95030 (US). MAROHL, Dan; 193 Herlong Avenue, San Jose, CA 95171 (US).</p> <p>(74) Agents: BERNADICOU, Michael, A. et al.; Blakely, Sokoloff, Taylor & Zafman LLP, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025 (US).</p>		<p>(81) Designated States: CN, JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: END EFFECTOR FOR WAFER HANDLER IN PROCESSING SYSTEM</p> <p>(57) Abstract</p> <p>A vacuum processing system has one or more wafer handlers with an end effector that, starting at its fixed end, tapers inwardly to form side recesses on opposing sides of the end effector and then tapers outwardly to a free end that is wider than the fixed end. At its free end, the end effector has another recess defining a pair of fingers with wafer supports thereon. The free end recess extends into the wafer sense cutout area. The pair of fingers providing the wafer supports at the free end of the end effector are spaced wider than the innermost exclusion zones for a standard 300 mm wafer carrier, but closer together than the outermost exclusion zones. In one embodiment, the end effector has a three-point ball, or bump, support for the wafer.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

END EFFECTOR FOR WAFER HANDLER IN PROCESSING SYSTEM**BACKGROUND OF THE INVENTION****Field of the Invention**

The present invention generally relates to the storage and transfer of wafers typically used in the fabrication of integrated circuits. Specifically, the invention relates to the end effector, or blade, of a wafer handler used to transfer wafers through and between chambers in a system for processing the wafers.

Background of the Related Art

Vacuum processing systems for processing 100mm, 200mm, 300mm or other diameter wafers are generally known. Typically, such vacuum processing systems have a centralized transfer chamber mounted on a monolith platform. The transfer chamber is the center of activity for the movement of wafers being processed in the system. One or more process chambers mount on the transfer chamber at slit valves through which wafers are passed by a wafer handler, or robot, in the transfer chamber. The valves close in order to isolate the process chambers while wafers are being processed therein. The wafer handler transfers the wafers through the transfer chamber and between the various other chambers attached to the transfer chamber.

Some common transfer chambers have facets to accommodate four to six chambers. The process chambers include rapid thermal processing (RTP) chambers, physical vapor deposition (PVD) chambers, chemical vapor deposition (CVD) chambers, etch chambers, etc. Physically, the process chambers are either supported by the transfer chamber and its platform or are supported on their own platform. Inside the system, the transfer chamber is typically held at a constant vacuum; whereas, the process chambers may be pumped to a greater vacuum for performing their respective processes. Afterward, the chamber pressure must be returned to the level in the transfer chamber before opening the valve to permit access between the chambers.

For some vacuum processing systems, such as the Centura™ system from Applied Materials, Inc., access to the transfer chamber for wafers from the exterior of the system, or from the manufacturing facility, is typically through one or more load

lock chambers. For some other vacuum processing systems, such as the Endura™ system from Applied Materials, Inc., a series of other chambers, including a buffer chamber, are provided between the transfer chamber and the load lock chambers. Thus, the transferring of the wafers through the vacuum in the system proceeds in stages, with the buffer chamber typically operating at about 1×10^{-6} torr, the transfer chamber typically operating at about 1×10^{-7} torr and the process chambers typically operating at about 1×10^{-9} torr in the case of physical vapor deposition process chambers.

The buffer chamber is an intermediate transfer chamber that may have optional pre-processing or post-processing chambers attached to it for performing additional processing steps on the wafers. Additionally, a pre-clean chamber and a cool-down chamber are interposed between the buffer chamber and the transfer chamber. Since the buffer chamber and the transfer chamber are typically held at different vacuum levels, the pre-clean chamber transitions the wafers from the vacuum level of the buffer chamber to the vacuum level of the transfer chamber in addition to cleaning the wafers in preparation for processing in the process chambers. After undergoing the primary process, the cool-down chambers transition the wafers from the vacuum level of the transfer chamber to the vacuum level of the buffer chamber while cooling the wafers. Another wafer handler, similar to the one disposed in the transfer chamber, is disposed within the buffer chamber in order to transfer the wafers through the buffer chamber and between the various chambers attached thereto.

The load lock chambers cycle between the pressure level of the ambient environment and the pressure level in either the transfer chamber or the buffer chamber in order for the wafers to be passed therebetween, so the load lock chambers transition the wafers between the atmospheric pressure of a very clean environment to the vacuum of the system. The load lock chambers attach to a mini-environment which transfers wafers in a very clean environment at atmospheric pressure from wafer pods to the load lock chambers. Thus, the mini-environment has another wafer handler for transferring the wafers.

The wafer handlers in the transfer chamber and the buffer chamber are typically very similar, if not identical. An example of such a wafer handler 10 is shown in Figures 1a and 1b. The wafer handler 10 is capable of rotational movement, but not translational movement since it is fixed in the center of its chamber. The wafer handler

10 has an end effector 12, 14, or blade, attached to an arm assembly 16 attached to the rotating portion 18 of the wafer handler 10. A wafer sits on the end effector 12, 14 in order to be transferred. A sensor beam may be projected through the wafer sense hole 15 in order to sense the presence of a wafer on the end effector 12, 14. The sensor beam may be an infrared beam directed at a detector. The wafer sense hole 15 is typically a standard size, and may be about 0.87 inches, or 22 mm, in radius. The arm assembly 16 moves the end effector 12, 14 radially outward from and inward towards the wafer handler 10 in order to insert a wafer into or retrieve a wafer from a chamber.

The wafer handler in the mini-environment is typically different from those in the transfer chamber or the buffer chamber, since it is usually capable of translational movement as well as rotational movement. A top view of an example of such a wafer handler 20 is shown in Figure 1c. The wafer handler 20 is typically track mounted so that it can move back and forth inside the mini-environment in order to service each of the pod loaders and load lock chambers attached thereto. The wafer handler 20 has an end effector 22 attached to an arm assembly 24 attached to the rotating portion 26 of the wafer handler 20. A wafer sits on the end effector 22 in order to be transferred. The arm assembly 24 moves the end effector 22 radially outward from and inward towards the rotating portion 26. The contact portion 25 of the end effector 22 is typically the only part of the end effector 22 that contacts the wafer. The contact portion 25 typically uses vacuum suction to hold the wafer. Vacuum suction is not a practical method to hold a wafer inside the transfer chamber or the buffer chamber, however, since these areas are already subject to a vacuum, which would lessen the hold of the vacuum suction. Additionally, it is desirable to have only one style of end effector, which may be used with all wafer handlers, in order to reduce the number of parts used in a processing system.

The end effector 14, shown in Figure 1a, has a constant width from the end effector mounting 27, or robot blade wrist, to the free end. A short recess in the free end forms two projections at the free end. A wafer is supported on small shelves located near the free end on the two projections and near the end fixed at the mounting 27. The shelf supports may provide no more than about 120 mils of space between the wafer and the end effector 14. For 300 mm wafers, the width poses a problem with the exclusion zones defined by the SEMI 300 mm Wafer Carrier and Interface Standard, a

standard set by Semiconductor Equipment and Materials International to create, inter alia, an industry standard configuration for a wafer carrier.

The exclusion zones are areas within a 300 mm wafer carrier or holder reserved for the wafer carrier to support the wafer and are illustrated by the areas 100, 102 as shown in Figure 4. The exclusion zones 100 are about 29 mm wide, 170 mm long and 250 mm apart. The exclusion zones 102 are about 25 mm wide, 32 mm long and 100 mm apart. The center of a wafer will be almost directly in the geometric center of the combined exclusion zones 100, and offset from the exclusion zones 102 by about 120 mm. An end effector may not cross these areas while lifting a wafer off of the supports in the wafer carrier, or there will be interference between the end effector and the wafer carrier supports. Thus, an end effector must be designed to avoid the exclusion zones 100, 102. The end effector 14, shown in Figure 1a, however, will cross directly into part of the exclusion zones 102.

One solution to avoid the exclusion zones 100, 102 is illustrated by the end effector 12, shown in Figure 1b. Also, the outline of the end effector 12 is shown, in dashed lines, in Figure 4 with respect to the exclusion zones. The end effector 12 has a constant width, similar to the end effector 14, except that it tapers almost immediately near the mounting end to a narrower width, which is then constant to the free end. Thus, the two projections at the free end of the end effector 12 will pass between the exclusion zones 102, as illustrated in Figure 4. A problem with the end effector 12 is that since the supports at the two projections are so close together, the wafer is unstable on these supports. A less stable support structure requires that the wafers be moved more slowly, so they don't slide on the end effector. Thus, the throughput of the processing system is decreased. Another problem with the supports at the free end of the end effector 12 being so close together is that, since the 300 mm wafer is so large, the wafer may bow, or sag, in the middle. Since the shelves that support the wafer on the end effector 12 may be no more than about 120 mils high, there is the potential for the underside of the wafer to become contaminated by sagging low enough to touch the end effector 12 near its center.

Another solution for avoiding the exclusion zones 100, 102 and providing a stable support and avoiding wafer bowing is to provide an end effector that is wider than end effector 14, so the projections at the free end will pass outside of the exclusion

zones 102, but inside the exclusion zones 100. A problem with an end effector that is generally shaped like the end effector 14, but which tapers outward almost immediately to form a constant width, is that its greater mass would cause it to have a greater momentum which would result in slower acceleration and deceleration of the end effector, and consequently, a longer time to move the wafer through the chamber. Another problem with the heavier end effector is that it would require a stronger, and therefore, more expensive, arm assembly 16, 24 to support and move the end effector.

A need, therefore, exists for an end effector that may be used in any chamber with any wafer handler, that avoids the exclusion zones, provides a stable support for the wafers and is light weight.

Summary of the Invention

A vacuum processing system has, in its transfer chamber, buffer chamber and/or mini-environment, a wafer handler with an end effector that, starting at its fixed end, tapers inwardly to side recesses on opposing sides of the end effector and then tapers outwardly to a free end wider than the fixed end and that, at its free end, has another recess defining a pair of fingers with wafer supports thereon. The free end recess extends into the wafer sensor cutout area. The side recesses and the free end recess extend into the end effector to limit the weight of the end effector while maintaining its strength. The side recesses give the end effector a unique hourglass shape.

The pair of fingers providing the wafer supports at the free end of the end effector are spaced wider than the innermost exclusion zones for a standard 300 mm wafer carrier, but closer together than the outermost exclusion zones. In other words, the pair of fingers have inner facing edges that are at least about 150 mm to about 160 mm apart and have outer opposing edges that are at most about 200 mm to about 250 mm apart. The wide spacing of the fingers provides a stable support platform for the wafer and prevents the wafer from bowing.

In one embodiment, the end effector has a three-point support for the wafer at locations near the fixed end of the end effector and on the two fingers near the free end. The three-point support may be a ball or bump support configuration.

Brief Description of the Drawings

So that the manner in which the above recited features, advantages and objects of the present invention are attained and can be understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to the embodiments thereof which are illustrated in the appended drawings.

It is to be noted, however, that the appended drawings illustrate only typical embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

Figure 1a is a perspective view of a wafer handler with a prior art end effector.

Figure 1b is a perspective view of a wafer handler with another prior art end effector.

Figure 1c is a top view of a wafer handler with still another prior art end effector.

Figure 2 is a top schematic view of a vacuum processing system having multiple wafer handlers.

Figure 3 is a perspective view of a wafer handler with an end effector according to the present invention.

Figure 4 is a top view of the end effector with the exclusion zones.

Figure 5 is a side view of a finger at the free end of the end effector.

Figure 6 is a side view of another embodiment of a finger at the free end of the end effector.

Figure 7 is a perspective view of another embodiment of an end effector.

Detailed Description of the Preferred Embodiment

Figure 2 generally shows a schematic top view of an embodiment of a vacuum processing system 30 of the present invention. This system 30 is of the type that is typically used for manufacturing integrated circuits on wafers in a vacuum. The vacuum processing system 30 includes a transfer chamber 32 and a buffer chamber 36 typically mounted on a platform (not shown) and generally forming a system monolith. The transfer chamber 32 has four process chambers 34 mounted at facets 35. The system monolith has two load lock chambers 46 mounted at facets 47. A mini-environment 54 attaches to the load lock chambers 46. The transfer chamber 32, the

buffer chamber 36 and the mini-environment 54 each have at least one wafer handler 44, 42, 58, or robot, for transferring wafers therethrough. Each of these wafer handlers 44, 42, 58 has at least one end effector (described below) designed to hold the wafers.

The process chambers 34 perform the process on the wafers in the vacuum processing system 30. Process chambers 34 may be any type of process chamber, such as a rapid thermal processing chamber, a physical vapor deposition chamber, a chemical vapor deposition chamber, an etch chamber, etc. The process chambers 34 may be supported by the transfer chamber 32 or may be supported on their own platforms depending on the configuration of the individual process chambers 34. Slit valves (not shown) in the facets 35 provide access and isolation between the transfer chamber 32 and the process chambers 34. Correspondingly, the process chambers 34 have openings (not shown) on their surfaces that align with the slit valves.

A pre-clean chamber 38 and a cool-down chamber 40 may be disposed between the transfer chamber 32 and the buffer chamber 36. The pre-clean chamber 38 cleans the wafers before they enter the transfer chamber 32, and the cool-down chamber 40 cools the wafers after they have been processed in the process chambers 34. The pre-clean chamber 38 and the cool-down chamber 40 may also transition the wafers between the vacuum levels of the transfer chamber 32 and the buffer chamber 36. The buffer chamber 36 has two expansion chambers 48 for performing additional processes on the wafers. The buffer chamber 36 further has a degas chamber 50 for driving off moisture on the wafers if necessary. A wafer aligner chamber 52 is typically attached to the buffer chamber 36 with a wafer aligner disposed therein for receiving the wafers from the wafer handler 42 aligning the wafers before the wafer handler 42 transfers the wafers to the pre-clean chamber 38 or a pre-processing chamber 48. Alternatively, the chambers 38, 40 may both be pass-through/cool-down chambers, and the chambers 48 may be separate pre-clean chambers.

The load lock chambers 46 transition the wafers between the ambient environment pressure to the buffer chamber vacuum pressure. Openings (not shown) in facets 47 provide access and valves provide isolation between the load lock chambers 46 and the buffer chamber 36. Correspondingly, the load lock chambers 46 have openings on their surfaces that align with the openings in facets 47. The load lock chambers 46 and the mini-environment 54 have corresponding openings (not shown)

providing access therebetween, while doors (not shown) for the openings provide isolation.

The mini-environment 54 has four pod loaders 56 attached on its front side. Openings (not shown) with corresponding doors 55 provide access and isolation between the mini-environment 54 and the pod loaders 56. The pod loaders 56 are mounted on the side of the mini-environment 54 and are essentially shelves for supporting the wafer pods (not shown) used to transport the wafers to and from the vacuum processing system 30.

The wafer handler 44 is disposed within the transfer chamber 32 for transferring a wafer 45 between the pre-clean chamber 38, the cool-down chamber 40 and the process chambers 34. A similar wafer handler 42 is disposed within the buffer chamber 36 for transferring a wafer 43 between the load lock chambers 46, the expansion chambers 48, the degas chamber 50, the wafer aligner chamber 52, the pre-clean chamber 38 and the cool-down chamber 40. Likewise, one or more wafer handlers 58 are disposed within the mini-environment 54 for transferring the wafers between the pod loaders 56 and the load lock chambers 46. The wafer handler 58 is typically mounted on a track so the wafer handler 58 can move back and forth in the mini-environment 54.

The wafer handlers 44, 42 are depicted as single-blade robots, meaning they have attachments for only one blade, or end effector, and can support only one wafer at a time. Figure 3 shows a dual-blade wafer handler 60, meaning that it has attachments 62 for two end effectors 64 and can support two wafers at a time. The present invention may be used with either of these types of wafer handlers and any other appropriate wafer handler, such as the type shown in Figure 1c.

The wafer handler 60 has a mounting plate 70 for mounting to the bottom of the interior of the chamber in which it resides. Above the mounting plate is a rotational portion 68, which rotates relative to the mounting plate 70 in order to align the end effectors 64 with a chamber opening in order to insert or remove a wafer. An actuating arm assembly 66 moves the end effectors 64 inward and outward in a line radial with the pivot point of the rotational portion 68. Below the mounting plate is a motor assembly 72 for driving the movements of the wafer handler 60.

The end effectors 64 have a wrist 74 (Figures 3 and 4) for mounting to the attachments 62 in order to fix one end of the end effectors 64. The free end has two fingers 76, or projections, defined by the outer opposing edges 78 and the inner facing edges 80. The end effector 64 has a wafer sense cutout 82 at a standard location for permitting a sensor beam, such as an infrared beam, to detect the presence of a wafer on the end effector 64. The end effector 64 also has a wafer center-finder hole 84. An operator may open the chamber and insert a pin into this hole 84 in order to calibrate the center of the end effector 64, so that the end effector 64 will be properly aligned when lifting a wafer from a support or setting the wafer down onto a support. Thus, the wafer may also be properly aligned when the end effector 64 sets it down, so position-sensitive processes will perform correctly, and so the wafer will not be damaged. Calibration may be verified at regular intervals to ensure that the end effector 64 does not slowly drift from its proper position, or it may be done when misalignment of the end effector 64 is suspected.

The outer edges 78 curve in a unique hourglass shape starting with an inward taper near the wrist 74, or fixed end, of the end effector 64. The outer edges 78 curve until they taper outwardly to form recesses 86 in the opposing outer edges 78. The outward taper of the outer edge curvature extends the end effector 64 to a width greater than the width at the fixed end and reduces to no taper at the free end of the end effector 64. The inner facing edges 80 curve together to form a recess that extends into the area for the wafer sense cutout 82. The recesses in the end effector 64 limit the mass of the end effector 64, so the end effector 64 is lightweight, without forfeiting the strength of the end effector 64 beyond the limit necessary to support a wafer thereon. The present invention is not limited to the particular shape shown in the top view of Figure 4. Rather, other contours for the edges 78, 80, including angled edges, fall within the scope of the invention. For comparison, the prior art end effector 12 is shown in dashed lines in Figure 4 illustrating the narrow constant width of the end effector 12, so that the fingers at its free end pass between the exclusion zones 102.

The end effector 64 is designed to support 300 mm wafers, but other end effectors incorporating the present invention may be designed to support wafers of other sizes, such as 100 mm, 150 mm or 200 mm. For 300 mm wafers, Semiconductor Equipment and Materials International (SEMI) created the SEMI 300 mm Wafer

Carrier and Interface Standard to define, inter alia, an industry standard configuration for a wafer carrier. Generally, a wafer carrier, such as a wafer cassette, supports one or more wafers on a set of shelves. A wafer handler must be able to remove a wafer from the carrier, so the wafer handler end effector must not cross through the shelves. Therefore, standard dimensions must be defined for the shelves so that all end effectors can interface properly with all wafer carriers, regardless of the vendors. The SEMI 300 mm Wafer Carrier and Interface Standard defines certain areas, called exclusion zones, in which wafer carrier shelves may be disposed and which end effectors must avoid. The exclusion zones for 300 mm wafers are shown in Figure 4 by the areas 100, 102. The dimensions of the exclusion zones 100, 102 are defined by their relation to the center point of an exemplary wafer seated on the wafer cassette shelves. In Figure 4 the center point of a wafer is generally the same as the center of the center finder hole 84.

The distance from the facing edges 104 of the exclusion zones 100 to the center point is about 125 mm, so the facing edges 104 are about 250 mm apart, giving about 25 mm overlap on each edge of a 300 mm wafer. The distance from the opposing edges 106 of the exclusion zones 100 to the center point is about 154 mm, so the opposing edges 106 are about 308 mm apart, giving a 4 mm clearance on either side of a 300 mm wafer. Edges 108 of each exclusion zone 100 are about 170 mm apart, and an imaginary x-axis at the midline between the edges 108 of both exclusion zones 100 aligns with the center point. Edges 110 are about 170 mm from the center point. The distance between opposing edges 112 of exclusion zones 102 is about 150 mm and an imaginary y-axis at the midline between the edges 112 aligns with the center point. Facing edges 114 are about 100 mm apart and equidistant from the y-axis. Edges 116 are about 120 mm from the x-axis, and edges 118 are about 152 mm from the x-axis.

The end effector 64 avoids the exclusion zones 100, 102 defined by the SEMI 300 mm Wafer Carrier and Interface Standard. The end effector 64 does not cross over any of the exclusion zones 100, 102 when lifting or setting down a wafer because, otherwise, the support shelves in the wafer cassette will interfere with the end effector's movement.

Since the fingers 76 at the free end of the end effector 64 must pass between edges 112 of exclusion zones 102 and edges 104 of exclusion zones 100, the facing edges 80 near the free end can be no closer than about 150 mm, and the opposing edges

78 near the free end can be no further apart than about 250 mm. Preferably, the inner facing edges 80 are about 160 mm apart, and the outer opposing edges 78 are about 200 mm apart, near the free end.

In addition to the 300 mm exclusion zones, the end effector 64 must be able to insert between a set of lift pins 130 commonly used to lift a wafer in various applications. A typical configuration for a set of lift pins 130 places them equidistant from the center of a wafer seated on top of them and at about 120° angles to each other so that the lift pins 130 provide a stable three-point support for the wafer. Thus, a preferred spacing for the lift pins 130 is about 120 mm from the center of a wafer to the near edge of the pins, giving a clearance of about 4 mm on either side of an end effector 64 that is 200 mm wide at its outer opposing edges 78.

Figure 5 shows a cross section of a finger 76. A shelf 150 near the free end support the wafer and provides clearance for the bottom side of a wafer above the level of the main part 152 of the end effector 64. Another shelf 154 supports the wafer near the fixed end. The finger 76 has a low-profile end shoe 156 for laterally containing the wafer. Figure 6 shows an alternative embodiment for a finger 76. The alternative finger 76 has a similar shelf 150 for supporting the wafer above the main part 152, but the alternative finger 76 has a high-profile end shoe 158 for laterally containing the wafer. The high-profile end shoe 158 permits the angled surface 160 to provide some slight wafer realignment if the wafer is radially offset up to about 3.7 mm, but the high profile limits the clearance of the end effector 64 in narrow spaces. The low-profile end shoe 156, on the other hand, provides greater clearance in tight spaces, such as between the wafers in a wafer cassette. Thus, the end effector 64 with the low-profile end shoe 156 is typically used in the buffer chamber 36, and the end effector 64 with the high-profile end shoe 158 is typically used in the transfer chamber 32.

An alternative embodiment for an end effector 64 is shown in the perspective view of Figure 7. This embodiment of the end effector 64 has the same general dimensions as the end effector 64 shown in Figure 4, but has ball, or bump, supports 162 for the wafer. The ball supports 162 form a three-point wafer support configuration for minimum contact with the wafer. A three-point wafer-to-blade contact typically requires fairly evenly spaced contact points for stable support. The

wide spacing of the balls 162 near the free end provides the fairly even spacing for easily adapting the end effector 64 to a three-point contact.

An advantage of the end effector 64 described herein is that it does not intrude on the SEMI specified wafer handling exclusion zones, so the end effector 64 can be used in any location in a system 30, including the transfer chamber 32, the buffer chamber 36 and the mini-environment 54. Another advantage is that the extra width of the free end provides a very stable support for the wafer, so the transfers may be faster, providing a higher throughput. Yet another advantage is that the extra width of the free end provides a more evenly distributed support configuration, so the wafer does not bow under its own weight and contact the middle of the end effector 64. Still another advantage of the end effector 64 is that the recesses remove unnecessary mass from the end effector 64, so the end effector 64 can be moved more easily and doesn't require a stronger, more expensive, wafer handler 60.

While the foregoing is directed to the preferred embodiment of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims which follow.

Claims:

1. A vacuum processing system comprising:
 - a first chamber;
 - at least one second chamber cooperatively engaged with the first chamber to permit a wafer to pass therebetween;
 - a wafer handler disposed within the first chamber for transferring the wafer therethrough to or from the second chamber; and
 - an end effector having:
 - a fixed end attached to the wafer handler and a free end;
 - a first wafer support proximate to the fixed end;
 - two wafer end supports proximate to the free end and spaced apart, the first wafer support and the two wafer end supports being for supporting the wafer thereon during transfer through the first chamber to or from the second chamber;
 - a wafer sense cutout;
 - an end recess between the two wafer end supports extending into the wafer sense cutout from the free end; and
 - a first side recess and a second side recess on opposing sides of the end effector.
2. The vacuum processing system of claim 1 wherein:
 - the end effector is for supporting a wafer having about a 300 mm diameter;
 - the two wafer end supports have facing edges; and
 - the facing edges of the two wafer end supports are spaced at least about 150 mm to about 160 mm.
3. The vacuum processing system of claim 1 wherein:
 - the end effector is for supporting a wafer having about a 300 mm diameter;
 - the two wafer end supports have opposing edges; and
 - the opposing edges of the two wafer end supports are spaced at most about 200 mm to about 250 mm.

4. The vacuum processing system of claim 1 wherein:
 - the end effector is for supporting a wafer having about a 300 mm diameter;
 - the end effector is capable of inserting the wafer into or removing the wafer from a wafer cassette having two inner exclusion areas and two outer exclusion areas according to SEMI 300 mm Wafer Carrier and Interface Standard; and
 - the two wafer end supports are spaced closer together than the two outer exclusion areas and further apart than the two inner exclusion areas.
5. The vacuum processing system of claim 1 wherein the first wafer support and the two wafer end supports form a three-point support.
6. The vacuum processing system of claim 5 wherein the three-point support comprises three ball supports.
7. A vacuum processing system comprising:
 - a first chamber;
 - at least one second chamber cooperatively engaged with the first chamber to permit a wafer to pass therebetween;
 - a wafer handler disposed within the first chamber for transferring the wafer therethrough; and
 - an end effector, for supporting the wafer during transfer through the first chamber and to or from the second chamber, the end effector having:
 - a fixed end having a first width attached to the wafer handler;
 - a free end having a second width greater than the first width;
 - opposing sides tapering inwardly at the fixed end from the first width, curving to an outward taper, and tapering outwardly to the second width at the free end;
 - and
 - a free end recess defining two fingers, the two fingers terminating at the free end, the end effector supporting the wafer at locations proximate to the fixed end and on the two fingers proximate to the free end.

8. The vacuum processing system of claim 7 wherein:
 - the end effector is for supporting a wafer having about a 300 mm diameter;
 - the two wafer end supports have facing edges; and
 - the facing edges of the two wafer end supports are spaced at least about 150 mm to about 160 mm.
9. The vacuum processing system of claim 7 wherein:
 - the end effector is for supporting a wafer having about a 300 mm diameter;
 - the two wafer end supports have opposing edges; and
 - the opposing edges of the two wafer end supports are spaced at most about 200 mm to about 250 mm.
10. The vacuum processing system of claim 7 wherein:
 - the end effector is for supporting a wafer having about a 300 mm diameter;
 - the end effector is capable of inserting the wafer into or removing the wafer from a wafer cassette having two inner exclusion areas and two outer exclusion areas according to SEMI 300 mm Wafer Carrier and Interface Standard; and
 - the two wafer end supports are spaced closer together than the two outer exclusion areas and further apart than the two inner exclusion areas.
11. The vacuum processing system of claim 7 wherein the first wafer support and the two wafer end supports form a three-point support.
12. The vacuum processing system of claim 11 wherein the three-point support comprises three ball supports.
13. The vacuum processing system of claim 7 further comprising:
 - a wafer sense cutout, the free end recess extending into the wafer sense cutout.
14. A wafer handler for use within a chamber and for transferring a wafer therethrough, the wafer handler comprising:
 - a motion arm; and
 - an end effector having:
 - a fixed end attached to the motion arm and a free end;
 - a first wafer support proximate to the fixed end;

two wafer end supports proximate to the free end and spaced apart, the first wafer support and the two wafer end supports being for supporting the wafer thereon during transfer through the chamber;

a wafer sense cutout;

an end recess between the two wafer end supports extending from the free end into the wafer sense cutout; and

a first side recess and a second side recess on opposing sides of the end effector.

15. The wafer handler of claim 14 wherein:

the end effector is for supporting a wafer having about a 300 mm diameter;

the two wafer end supports have facing edges; and

the facing edges of the two wafer end supports are spaced at least about 150 mm to about 160 mm.

16. The wafer handler of claim 14 wherein:

the end effector is for supporting a wafer having about a 300 mm diameter;

the two wafer end supports have opposing edges; and

the opposing edges of the two wafer end supports are spaced at most about 200 mm to about 250 mm.

17. The wafer handler of claim 14 wherein:

the end effector is for supporting a wafer having about a 300 mm diameter;

the end effector is capable of inserting the wafer into or removing the wafer from a wafer cassette having two inner exclusion areas and two outer exclusion areas according to SEMI 300 mm Wafer Carrier and Interface Standard; and

the two wafer end supports are spaced closer together than the two outer exclusion areas and further apart than the two inner exclusion areas.

18. The wafer handler of claim 14 wherein the first wafer support and the two wafer end supports form a three-point support.

19. The wafer handler of claim 18 wherein the three-point support comprises three ball supports.

20. A wafer handler for use within a first chamber and for transferring a wafer therethrough to or from a second chamber, the wafer handler comprising:

an end effector actuator; and

an end effector, for supporting the wafer during transfer through the first chamber and to or from the second chamber, the end effector having:

a fixed end having a first width attached to the end effector actuator;

a free end having a second width greater than the first width;

opposing sides tapering inwardly at the fixed end from the first width, curving to an outward taper, and tapering outwardly to the second width at the free end; and

a free end recess defining two fingers at the free end.

21. The wafer handler of claim 20 wherein:

the end effector is for supporting a wafer having about a 300 mm diameter;

the two wafer end supports have facing edges; and

the facing edges of the two wafer end supports are spaced at least about 150 mm to about 160 mm.

22. The wafer handler of claim 20 wherein:

the end effector is for supporting a wafer having about a 300 mm diameter;

the two wafer end supports have opposing edges; and

the opposing edges of the two wafer end supports are spaced at most about 200 mm to about 250 mm.

23. The wafer handler of claim 20 wherein:

the end effector is for supporting a wafer having about a 300 mm diameter;

the end effector is capable of inserting the wafer into or removing the wafer from a wafer cassette having two inner exclusion areas and two outer exclusion areas according to SEMI 300 mm Wafer Carrier and Interface Standard; and

the two wafer end supports are spaced closer together than the two outer exclusion areas and further apart than the two inner exclusion areas.

24. The wafer handler of claim 20 wherein the first wafer support and the two wafer end supports form a three-point support.

25. The wafer handler of claim 24 wherein the three-point support comprises three ball supports.
26. The wafer handler of claim 20 further comprising:
a wafer sense cutout, the free end recess extending into the wafer sense cutout.
27. An end effector for use with a wafer handler in a chamber and for supporting a wafer being transferred through the chamber, the end effector comprising:
a fixed end for attaching to the wafer handler and a free end;
a first wafer support proximate to the fixed end;
two wafer end supports proximate to the free end and spaced apart, the first wafer support and the two wafer end supports being for supporting the wafer thereon during transfer through the chamber;
a wafer sense cutout;
an end recess between the two wafer end supports extending from the free end into the wafer sense cutout; and
a first side recess and a second side recess on opposing sides of the end effector.
28. The end effector of claim 27 wherein:
the end effector is for supporting a wafer having about a 300 mm diameter;
the two wafer end supports have facing edges; and
the facing edges of the two wafer end supports are spaced at least about 150 mm to about 160 mm.
29. The end effector of claim 27 wherein:
the end effector is for supporting a wafer having about a 300 mm diameter;
the two wafer end supports have opposing edges; and
the opposing edges of the two wafer end supports are spaced at most about 200 mm to about 250 mm.

30. The end effector of claim 27 wherein:
the end effector is for supporting a wafer having about a 300 mm diameter;
the end effector is capable of inserting the wafer into or removing the wafer from a wafer cassette having two inner exclusion areas and two outer exclusion areas according to SEMI 300 mm Wafer Carrier and Interface Standard; and
the two wafer end supports are spaced closer together than the two outer exclusion areas and further apart than the two inner exclusion areas.
31. The end effector of claim 27 wherein the first wafer support and the two wafer end supports form a three-point support.
32. The end effector of claim 31 wherein the three-point support comprises three ball supports.
33. An end effector for use with a wafer handler in a chamber and for supporting a wafer being transferred through the chamber, the end effector comprising:
a fixed end having a first width attached to the wafer handler;
a free end having a second width greater than the first width;
opposing sides tapering inwardly at the fixed end from the first width, curving to an outward taper, and tapering outwardly to the second width at the free end; and
a free end recess defining two fingers at the free end.
34. The end effector of claim 33 wherein:
the end effector is for supporting a wafer having about a 300 mm diameter;
the two wafer end supports have facing edges; and
the facing edges of the two wafer end supports are spaced at least about 150 mm to about 160 mm.
35. The end effector of claim 33 wherein:
the end effector is for supporting a wafer having about a 300 mm diameter;
the two wafer end supports have opposing edges; and
the opposing edges of the two wafer end supports are spaced at most about 200 mm to about 250 mm.

36. The end effector of claim 33 wherein:
the end effector is for supporting a wafer having about a 300 mm diameter;
the end effector is capable of inserting the wafer into or removing the wafer from a wafer cassette having two inner exclusion areas and two outer exclusion areas according to SEMI 300 mm Wafer Carrier and Interface Standard; and
the two wafer end supports are spaced closer together than the two outer exclusion areas and further apart than the two inner exclusion areas.
37. The end effector of claim 33 wherein the first wafer support and the two wafer end supports form a three-point support.
38. The end effector of claim 37 wherein the three-point support comprises three ball supports.
39. The end effector of claim 33 further comprising:
a wafer sense cutout, the free end recess extending into the wafer sense cutout.

1/7

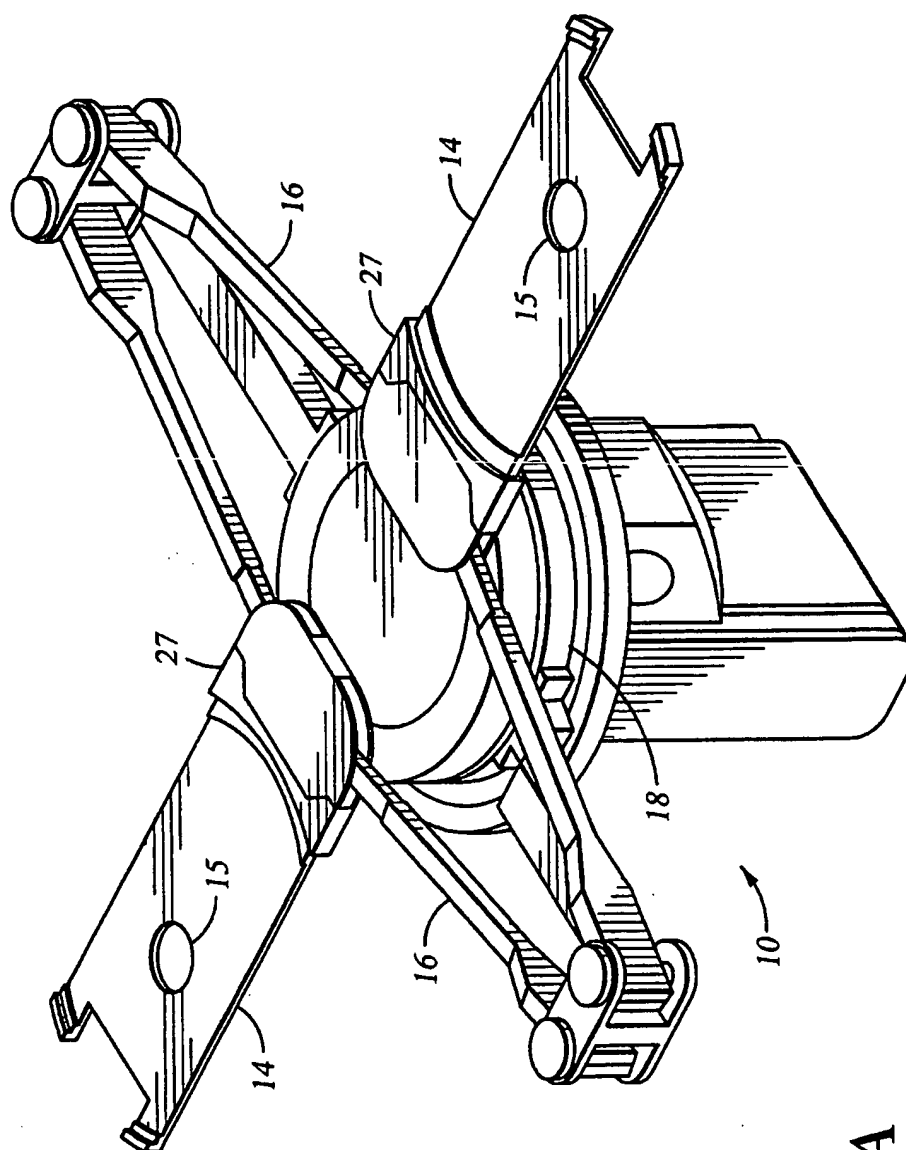


Fig. 1A
(PRIOR ART)

2/7

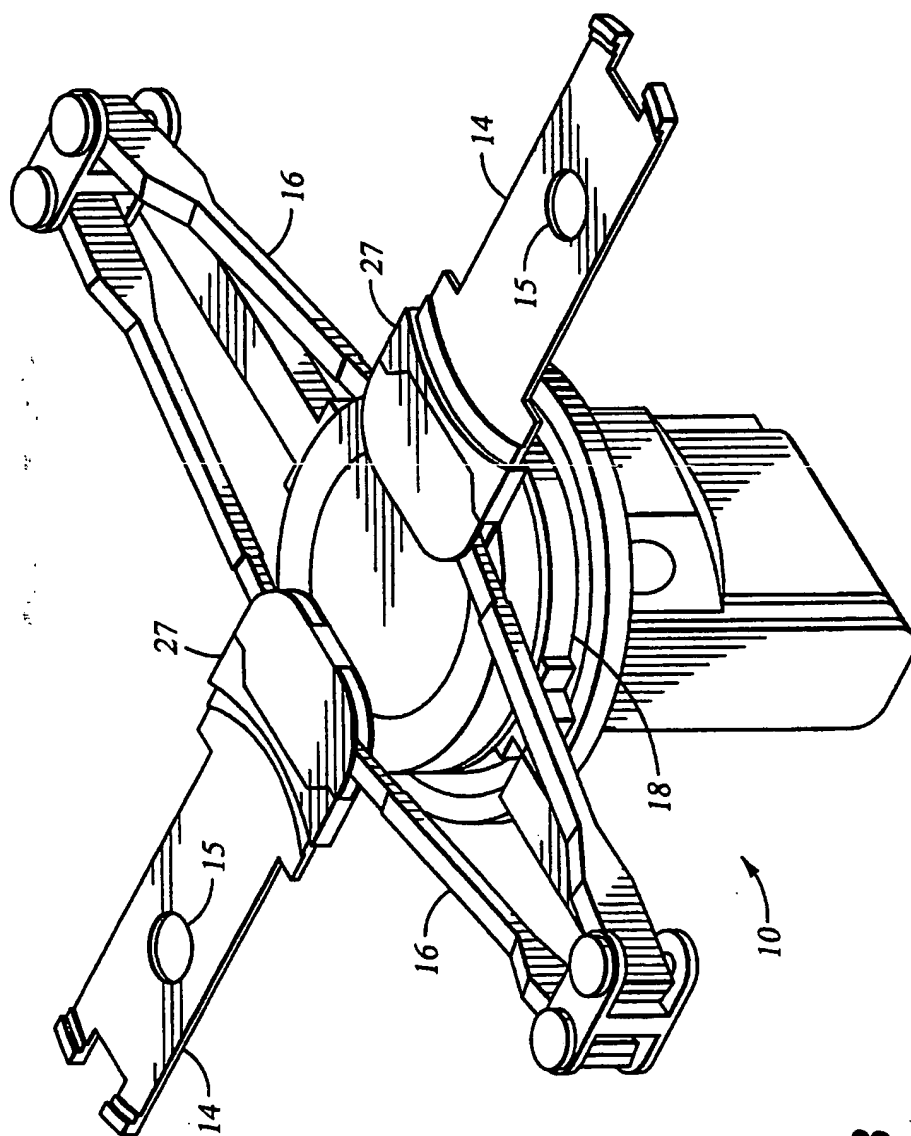


Fig. 1B
(PRIOR ART)

3/7

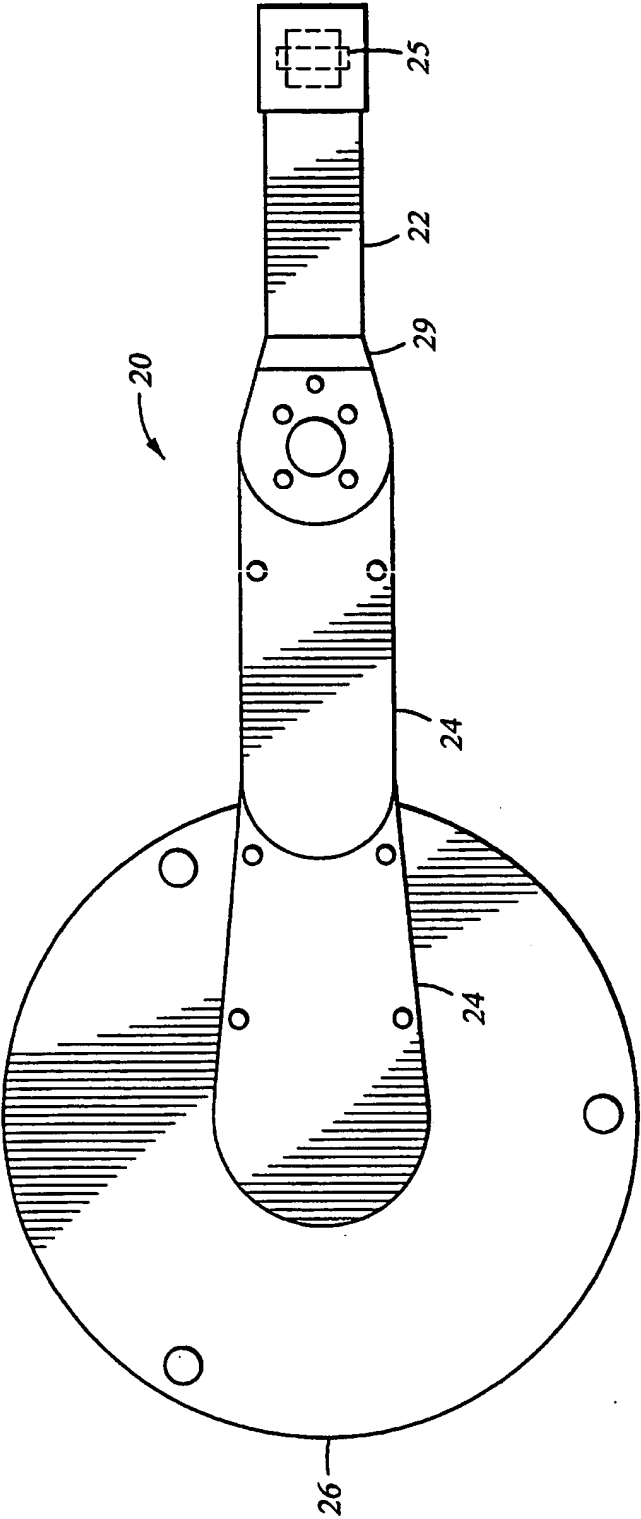


Fig. 1C
(PRIOR ART)

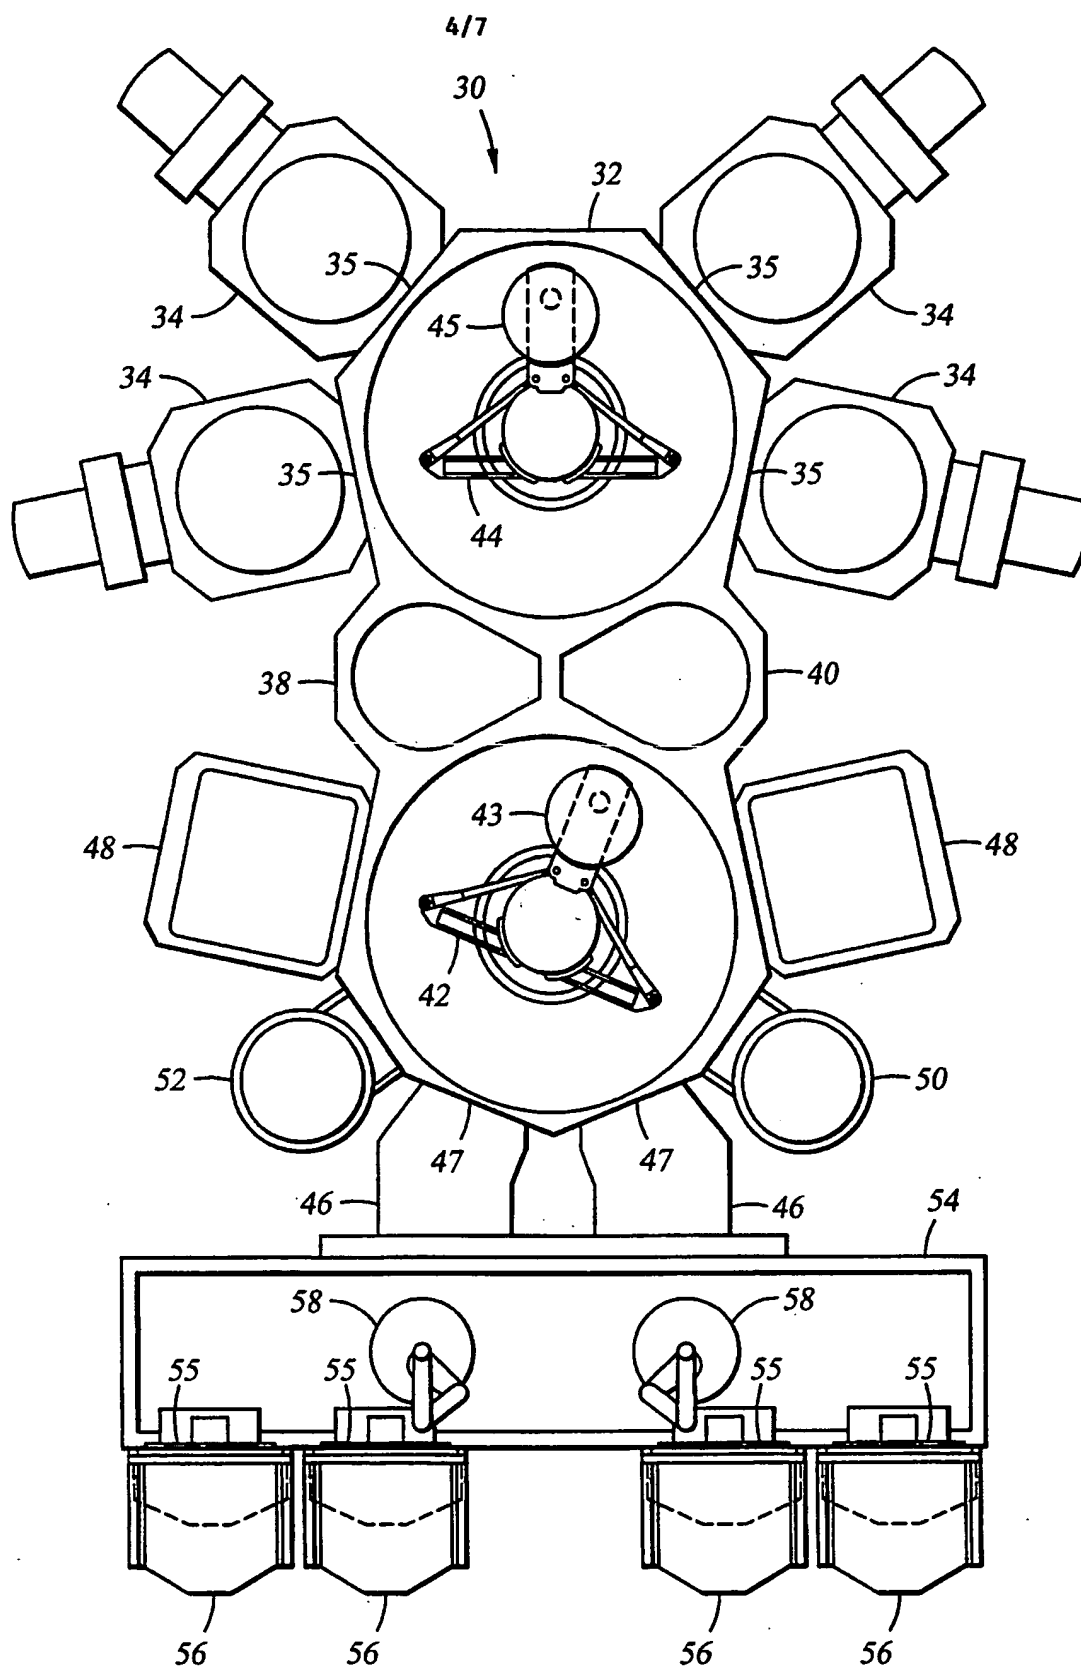


Fig. 2

SUBSTITUTE SHEET (RULE 26)



5/7

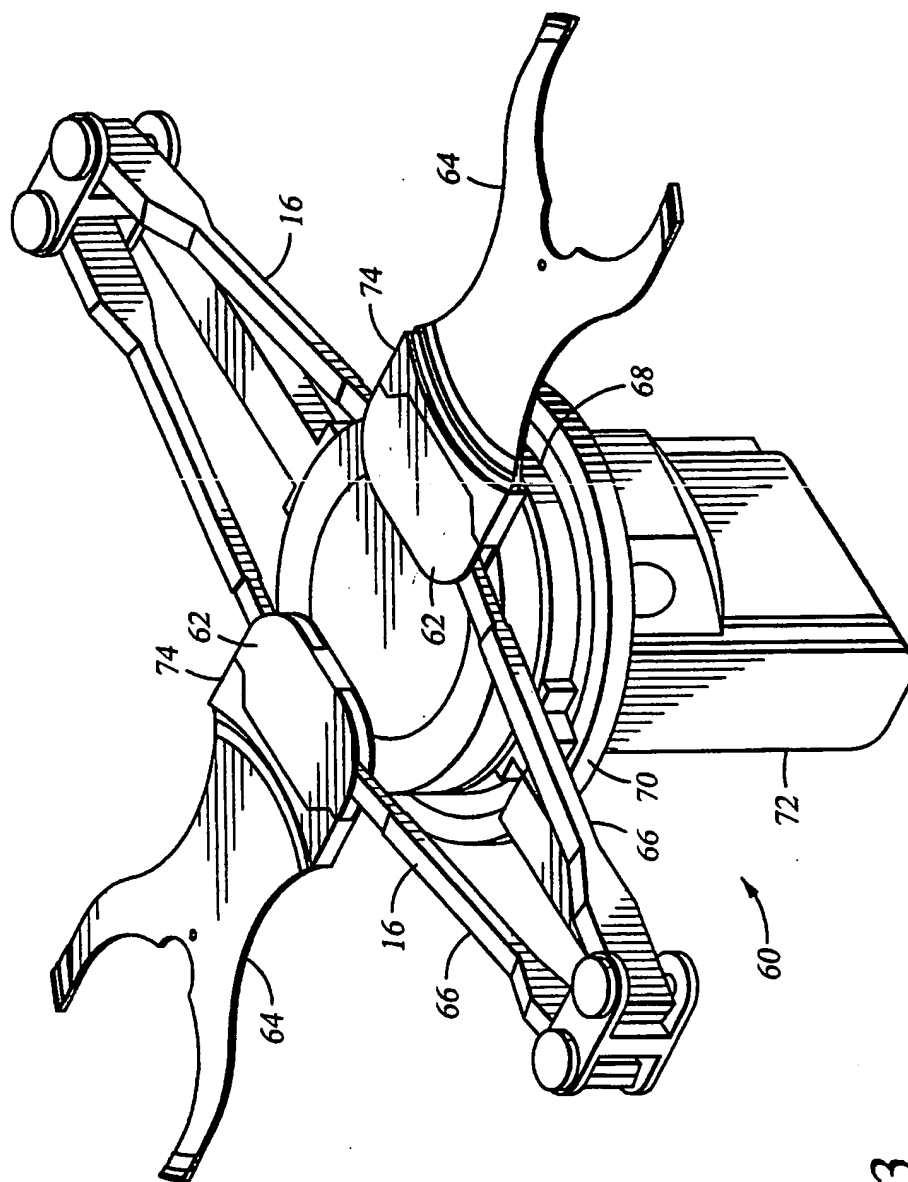


Fig. 3



6/7

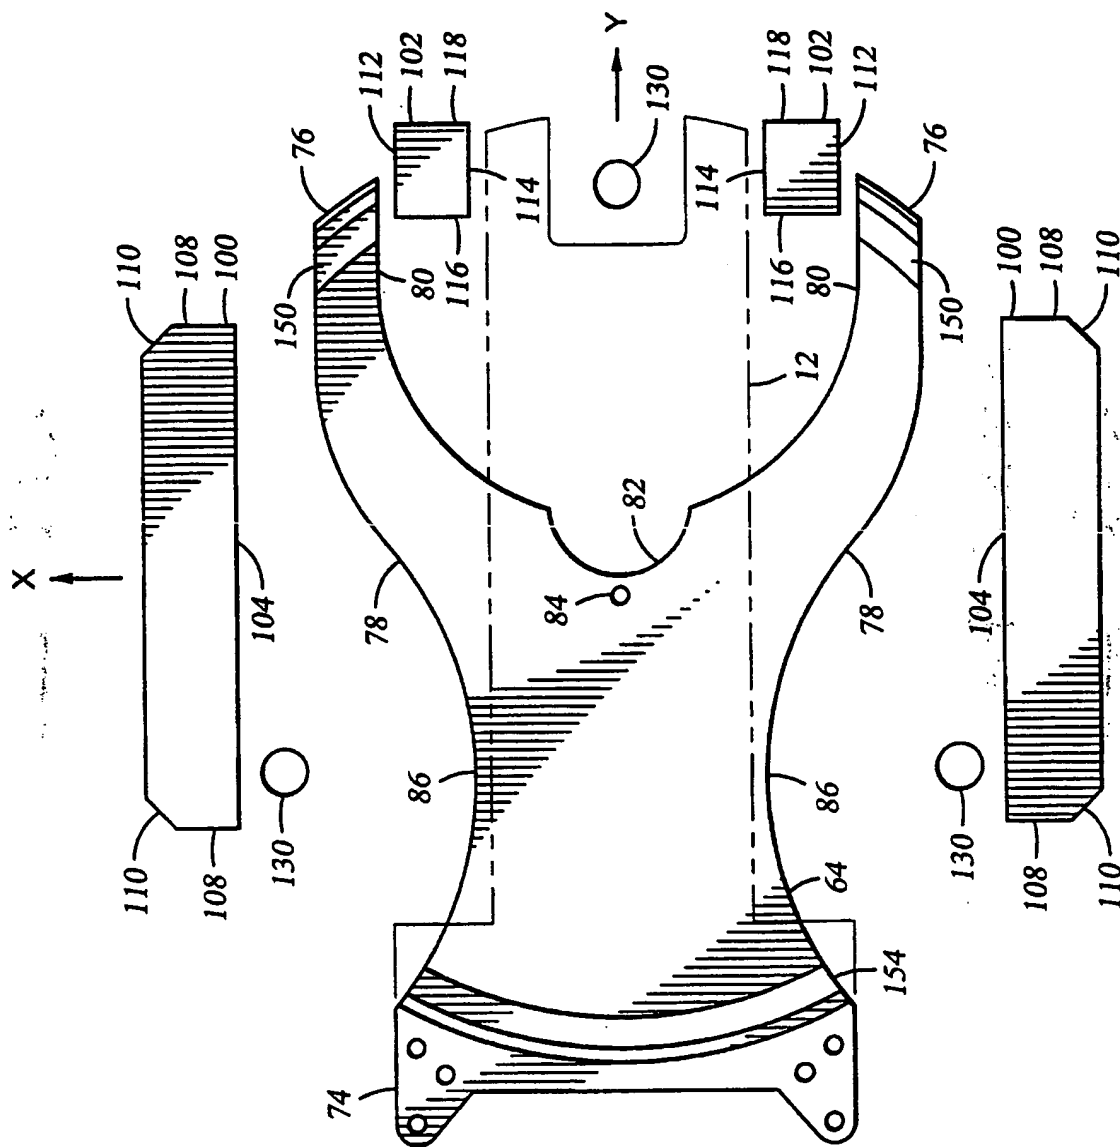


Fig. 4

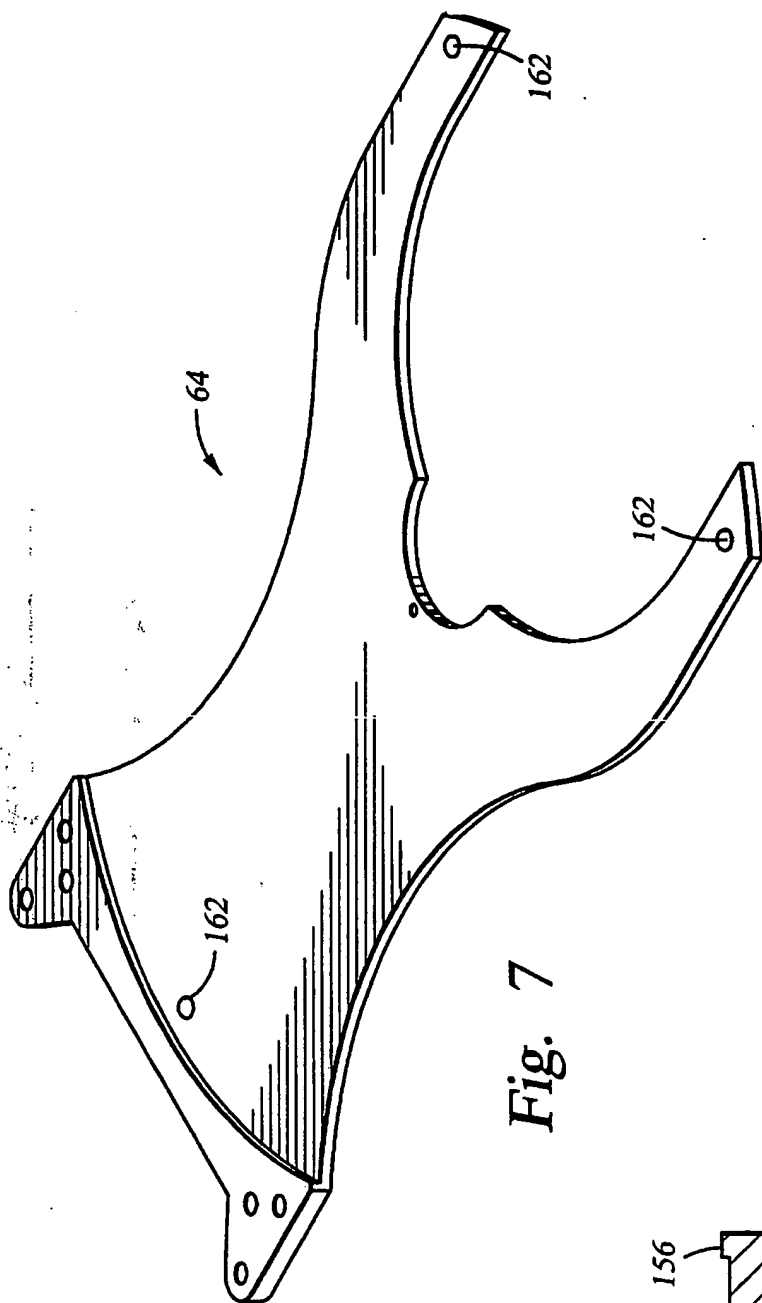


Fig. 7

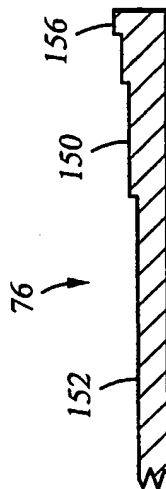


Fig. 5

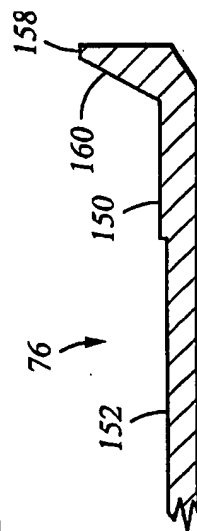


Fig. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/03114

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H01L21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 102 495 A (MAHER ET AL.) 7 April 1992 see abstract; figures 5-7 see column 6, line 12-19 see column 7, line 23-34	1, 14, 27
A	---	7, 13, 20, 26, 33, 39
Y	EP 0 820 091 A (APPLIED MATERIALS, INC.) 21 January 1998 see abstract; figure 1B see column 12, line 44-58	1, 14, 27
A	---	7, 13, 20, 26, 33, 39
A	EP 0 342 940 A (VEECO INSTRUMENTS INC.) 23 November 1989 see abstract; figures 2, 5A ---	1, 7, 14, 20, 27, 33
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

18 June 1999

Date of mailing of the international search report

25/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Oberle, T

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/03114

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 004 399 A (SULLIVAN ET AL.) 2 April 1991</p> <p>see abstract; figure 1 see column 3, line 61-68 ---</p>	<p>1,7,13, 20,26, 27,33,39</p>
A	<p>EP 0 776 035 A (KOKUSAI ELECTRIC CO., LTD) 28 May 1997</p> <p>see abstract; figure 4 see column 7, line 2-32 -----</p>	<p>1,5,7, 11,14, 18,20, 26,27, 31,33,37</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/03114

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5102495 A	07-04-1992	US 4715921 A US 5308431 A CA 1331163 A EP 0246453 A JP 2596422 B JP 63032931 A JP 7183282 A US 5013385 A US 5344542 A CA 1283174 A DE 3751738 D DE 3751738 T EP 0264945 A EP 0680074 A JP 63133532 A	29-12-1987 03-05-1994 02-08-1994 25-11-1987 02-04-1997 12-02-1988 21-07-1995 07-05-1991 06-09-1994 16-04-1991 18-04-1996 07-11-1996 27-04-1988 02-11-1995 06-06-1988
EP 0820091 A	21-01-1998	JP 10064971 A SG 55349 A	06-03-1998 21-12-1998
EP 0342940 A	23-11-1989	US 4949783 A DE 68928468 D DE 68928468 T DE 342940 T JP 2030128 A JP 2717308 B	21-08-1990 15-01-1998 02-07-1998 08-06-1995 31-01-1990 18-02-1998
US 5004399 A	02-04-1991	NONE	
EP 0776035 A	28-05-1997	WO 9642108 A	27-12-1996